

OCEANSENSE4™

DETECTS ALL SUBSEA LEAK TRACING DYES



Designed to detect all fluorescing trace dyes used in subsea leak detection from a single 6000m rated Titanium housing, the OceanSENSE 4 utilises the same core technology as the industry standard OTAQ OceanSENSE subsea leak and cement returns detection system.

The ROV mount OceanSENSE 4 enables operators to instantly switch between detecting different dye types 'on-the-fly' via the newly designed topside software. The ability to detect all dye types means there is no requirement to mobilise multiple detection configurations or recover the ROV to surface. OceanSENSE 4 is engineered to save operators time and money and to eliminate all risk associated with sensor and dye incompatibilities.



Utilising cutting edge technology OceanSENSE 4 is extremely capable. When mixing fluorescing dye into the carrier medium, the industry standard is 200,000 parts per billion – all OceanSENSE models detect dye to 6 parts per billion. The sensor feedback based topside software removes human judgement and inconsistencies from the detection operation. The OceanSENSE 4 unequivocally informs the operator when dye is present in the water column thus, depending on the application, locating the leak, confirming asset integrity or confirming the arrival of cement at the seafloor.

OceanSENSE was first released to the market in 2009, with operators rapidly positioning the system as the global industry standard for subsea dye detection. To date, OceanSENSE technology has achieved in excess of 50,000 offshore days on over 1000 subsea projects. The OceanSENSE 4 builds on this pedigree by ensuring increased operator flexibility while delivering repeatability of results, protecting the environment and reducing offshore operational costs.



OceanSense 4 – Titanium 6000m Rated

Model	OceanSENSE 4
Max Detect Range	Up to 15m
Material	Titanium
Depth rating	6000m
Weight (in air)	5kg
Weight (in water)	3.6kg
Voltage	18-32 VDC
Power requirements	500mA @24 VDC
Data	RS232 / RS485
Connector	MCBH8M wet mate
Interface	OceanSENSE App supplied on full configured laptop
Part no	OS-200120

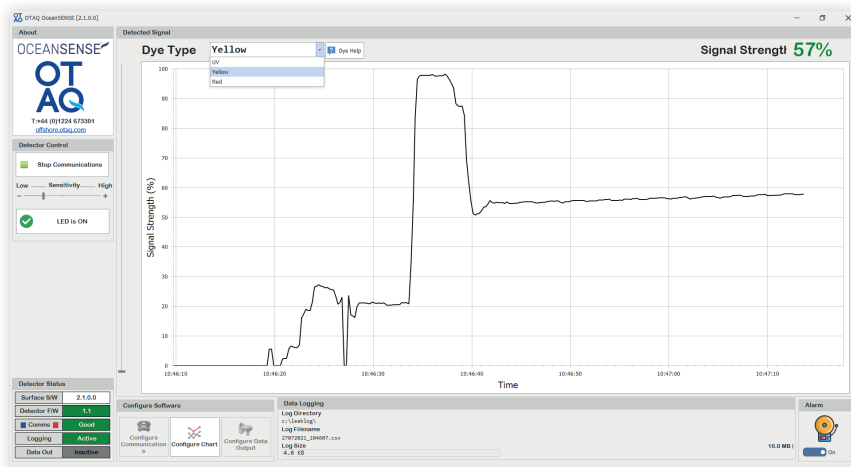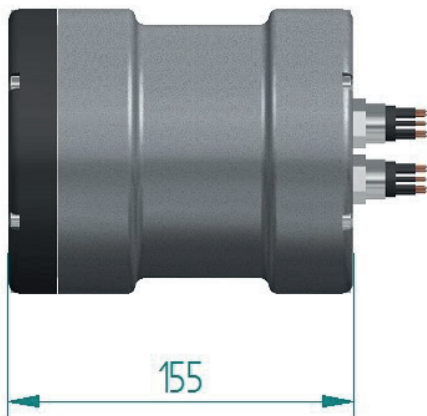

OTAQ Offshore Ltd
 Crombie Lodge
 Aberdeen Innovation Park
 Campus Two
 Aberdeen, AB22 8GU, UK

+44 (0)1224 673301
 info@otaq.com

otaq.com

A Subsidiary of OTAQ plc