

Rayfin with UltraOptics

Ultra-wide angle lens, Digital Stills, IP Camera, 4K and HD video



Key Features

- Live HD (Ethernet or Coax) or 4K (Fiber)
- Accepts Pan-tilt unit controls
- 21MP digital stills (JPEG and RAW) with LED strobe synchronization
- 4K and HD video clips stored to 512GB solid state memory
- Real-time media download and control of all functions (Exposure, focus, etc.)
- Sensor-crop PTZ (5x optical equivalent)
- NTP time server synchronization
- NAS (Network Attached Storage)

 Rayfin


**Harshest Conditions.
Clearest Images.**

SubC's wide-angle UltraOptics are designed for situational awareness. The enhanced 120° field-of-view and low distortion, combined with sensor PTZ make it a viable replacement for mechanical PTZ units.





1. Strobe toggle
 2. Auto/manual exposure toggle
 3. Auto exposure value
 4. Shutter Speed
 5. ISO Value
 6. Auto/manual focus
 7. Manual focus slider
 8. Internal temperature indicator
 9. Disconnect from camera
 10. Settings button
 11. Thumbnails
 12. Digital pan/tilt/zoom control
 13. Record video
 14. Take still
 15. Focus reticle
 16. Media storage remaining
-
- S1. Recording Settings
 - S2. Still Settings
 - S3. White Balance Settings
 - S4. Gallery
 - S5. Network Attached Storage
 - S6. Attached Aux Device Settings

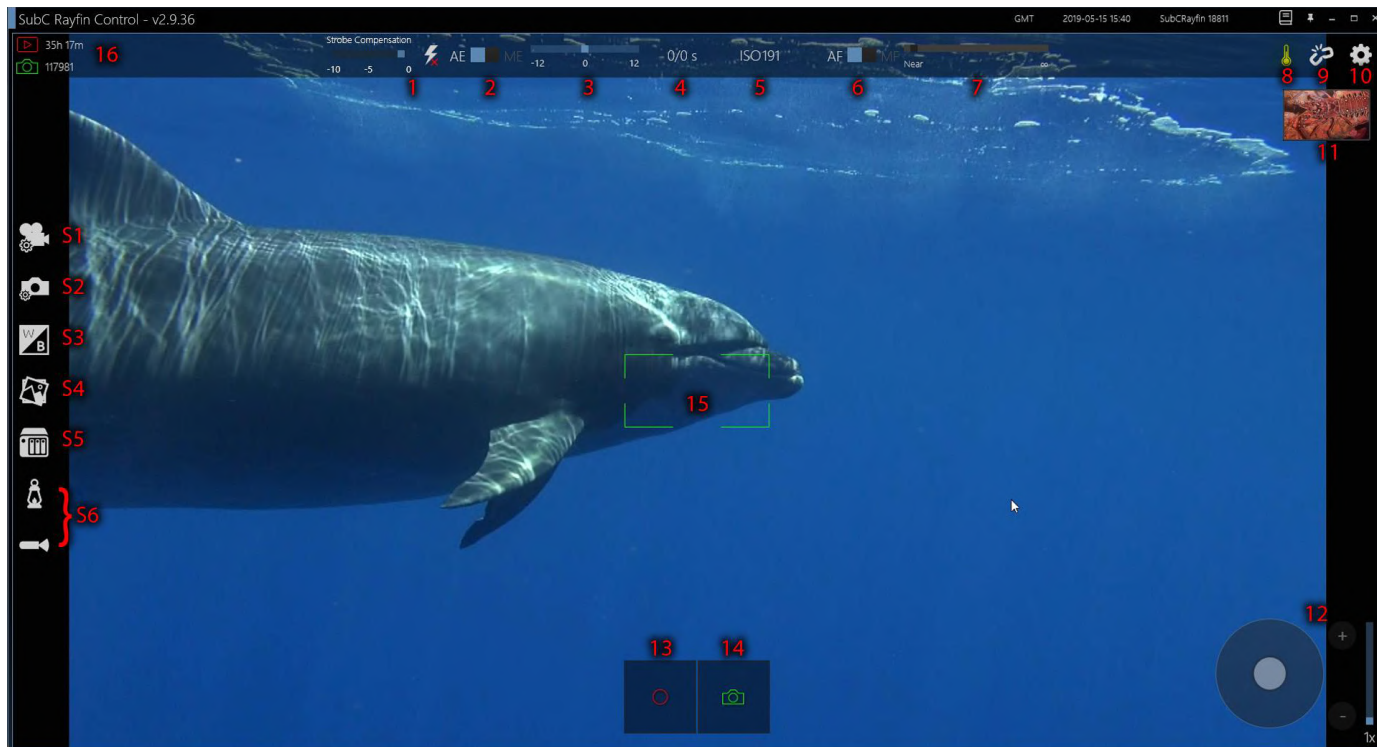

The Rayfin includes 2 years of free software updates.


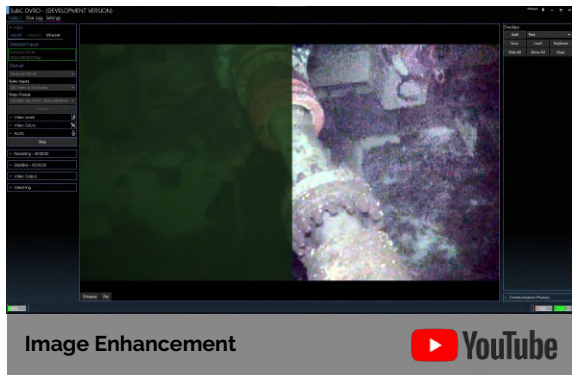



Image Enhancement

Real-time image enhancement is a feature that is now available with the SubC DVRO. This built-in tool will help operators get the job done quickly and efficiently by allowing them to clearly see the videos and stills they're capturing in real time.

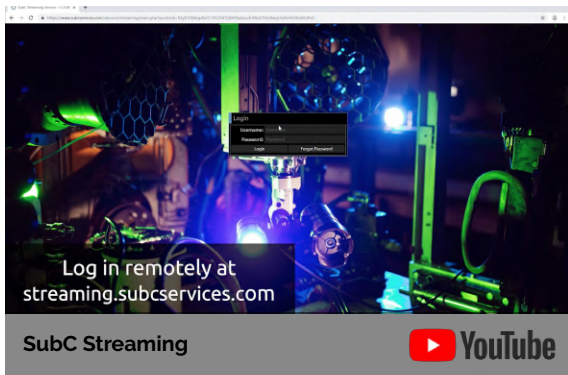

Secure VSAT Video Streaming

SubC Streaming is a cloud-based service that delivers high quality video and audio to your browser using WebRTC and the Rayfin Software. A username and password is all you need to log into SubC's secure server to view your footage in real time.

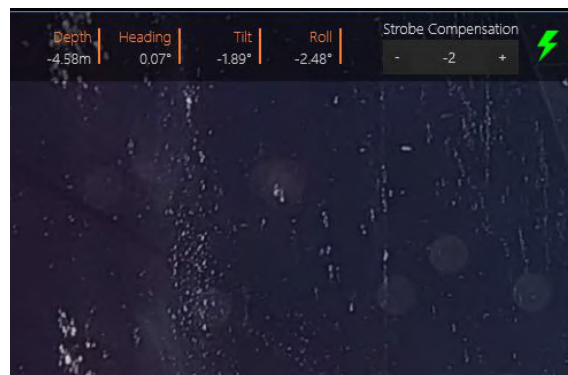

Built-in IMU for Heading, Tilt and Roll Data with Live OSD View


The Rayfin is a data logger as well as a real-time platform - the IMU and optional depth sensor data is displayed in the control software. NMEA sensor data is automatically time stamped and logged as a CSV in the Rayfin file system. Other sensors can be integrated on request.

The camera can also operate as a NMEA data logger so you can pipe in live data from other sensors.

NMEA formatted data can be sent to the camera via Serial or Ethernet.

- TCP or UDP port: 888g
- RS232 or RS485 on Aux0 and Aux1


The data will be time-stamped and stored in a CSV file alongside the images. The camera contains an internal accelerometer, magnetometer and gyro (IMU) track orientation and this data can also be logged. System time, altimeter, depth, position, heading and other data can be input and recorded in real time.

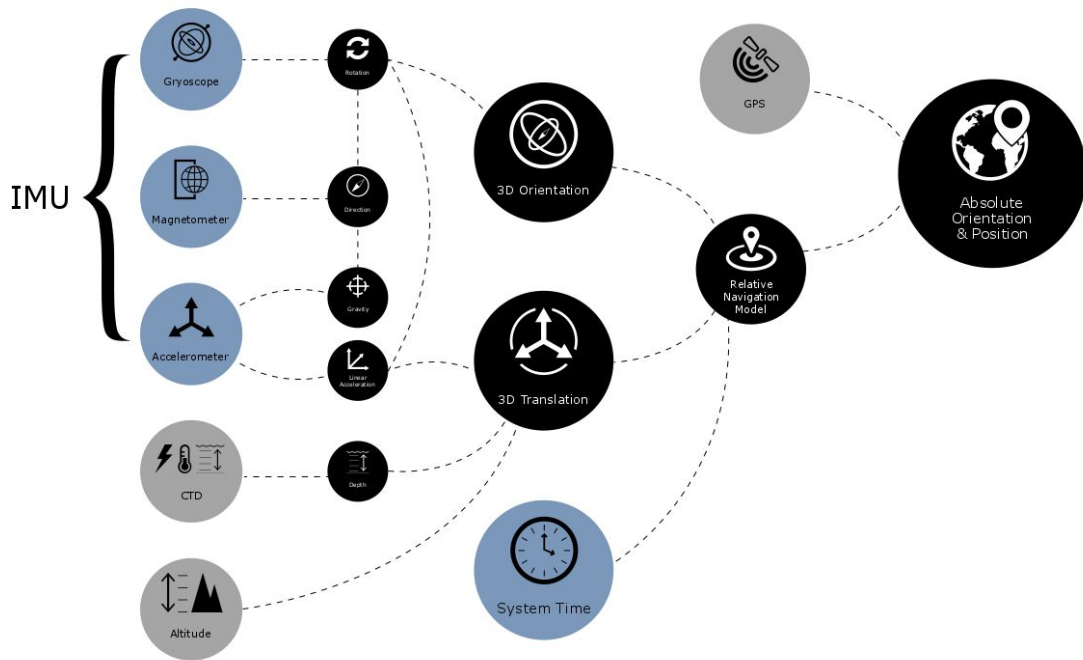

Compatible sensors include system clocks, depth, altimeter, gyro, CTD and others with NMEA formatting.

Depth	Heading	Tilt	Roll
-4.58m	0.07°	-1.89°	-2.48°

Multi-purpose Auxiliary Ports



LED strobe and lamp

The camera controls the LED as a lamp when recording video or as a strobe by syncing with the exposure time to capture objects in highest detail for digital stills.



Parallel and Line Lasers

Lasers connect to aux ports with TTL control. The MantaRay projects two parallel beams for distance and scale. The Skate projects a precision uniform beam line for image processing.



NMEA Sensors

The camera is a data-logger for NMEA sensors. Each string receives a time-stamp and is logged in parallel with internal camera sensors, video and images.



Pan-Tilts and Controllers


The camera ports can drive pan-tilt devices through software direct controls. The aux ports can also be configured as a controller for the camera.

Video Transmission Options



HD over Ethernet (HDE)

Live video, control and media are transferred over 10/100 and Gigabit Ethernet. Composite video and serial control for older system compatibility.

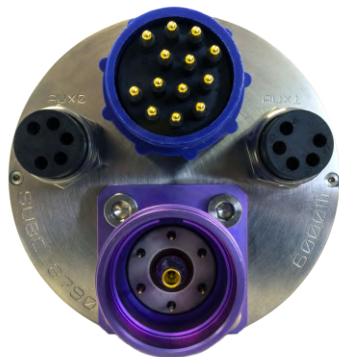

HD over Coax (HDC)

Uncompressed HD video transferred over HD-SDI, Live video and stills are also transferred over Ethernet connection. Serial control included.



Ultra HD over Fiber Optics (UHDF)

4K over fiber optics. Ethernet, HD video and comms for uncompromised live video quality. Serial control included.



PowerLine Ethernet (PLE)

Power and Ethernet over 2 wires. Used for drop camera systems to reduce the cost of cabling.

Sensor and Lens

Pixel count: 21MP

Max image size: 5344 x 4008

Max shutter speed: 1/32500

Max video resolution: 4K UHD

Sensor: Exmor RS™

Lens: 1.92mm f/1.8

Zoom: 21MP sensor zoom

(5x optical equivalent)

Focus Range: 0.1m to infinity

System

Max Continuous Still Rate: 3Hz

Recording codecs: H.265(HEVC), H.264

Live video: IP Ethernet, Composite

Streaming codec: H.264


Internal recording capacity: 512 GB

Latency Ethernet: 225ms ±50ms

QC parameters of UltraOptics

Diagonal FOV: 116° min

Distortion: 2% max

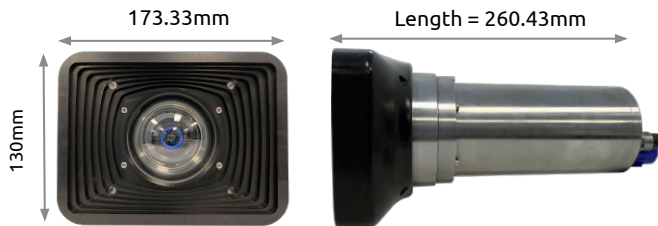

Electronics

Tx: 60m (GigE), 80m (10/100)

Tx with 2x LED: 20m (GigE), 40m (10/100)

Protection: Short circuit, UV-OV, ESD, OT

Voltage: 16.5 - 32.5 Vdc

Control: Ethernet, Serial RS232/485

Power(W): 7.5(idle), 8(recording), 13.5(peak)

Mechanical

Materials: BK7, Grade 5 Titanium

Weight: 2.32Kg in water, 4.45Kg in air

Max in-water operating temp: 30°C

Depth Rating: 6000m

Subconn MCBH5F [AUX0]	Subconn MCBH5F [AUX1]	Subconn DBH13M + DLSA-M [IP, Serial]	#
GND	GND	GND	1
PWR	PWR	Iso GND (Shield) (NC on system end)	2
AUX0 Out	AUX1 Out	PWR	3
AUX0 RS-232 Tx / RS-485 B(-)	AUX1 RS-232 Tx / RS-485 B(-)	(Brown) TP4- [GigE]	4
AUX0 RS-232 Rx / RS-485 A(+)	AUX1 RS-232 Rx / RS-485 A(+)	(White/Brown) TP4+ [GigE]	5
Important notes: <ul style="list-style-type: none"> SubC bulkheads are wired to Ethernet B standard. 13 pin bulkhead is limited to 4A per pin. The camera automatically limits power to the LEDs. In-line cable part number for Ethernet bulkhead: Subconn DIL13F + DLSA-F 		(Blue) TP3- [GigE]	6
		(White/Blue) TP3+ [GigE]	7
		(Orange) TP1- [10/100]	8
		(White/Orange) TP1+ [10/100]	9
		(Green) TP2- [10/100]	10
		(White/Green) TP2+ [10/100]	11
		Composite	12



Sensor and Lens

Pixel count: 21MP

Max image size: 5344 x 4008

Max shutter speed: 1/32500

Max video resolution: 4K UHD

Sensor: Exmor RS™

Lens: 1.92mm f/1.8

Zoom: 21MP sensor zoom
 (5x optical equivalent)

Focus Range: 0.1m to infinity

System

Max Continuous Still Rate: 3Hz

Recording codecs: H.265(HEVC), H.264

Live video: IP Ethernet, 3G-SDI, HD-SDI

Streaming codec: H.264

Internal recording capacity: 512 GB


Latency Ethernet: 225ms ±50ms

Latency HD-SDI: 85ms ±25ms

QC parameters of UltraOptics

Diagonal FOV: 116° min

Distortion: 2% max

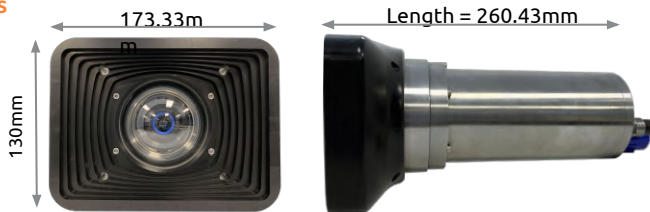

Electronics

HD-SDI Resolution: 1080/60p/50p,
 1080/30p/24p, 720/60p/50p

Tx: 20m (HD-SDI), 60m (GigE), 80m
 (10/100)

Tx with 2x LED: 10m (HD-SDI), 20m (GigE),
 40m (10/100)

Protection: Short circuit, UV-OV,
 ESD, OT

Voltage: 16.5 - 32.5 Vdc

Control: Ethernet, Serial RS232/485

Power(W): 7.5(idle), 8(recording), 13.5(peak)

Mechanical


Materials: BK7, Grade 5 Titanium

Weight: 2.32Kg in water, 4.45Kg in air

Max in-water operating temp: 30°C

Depth Rating: 6000m

Subconn MCBH5F [AUX0 Port]	Subconn MCBH5F [AUX1 Port]	CRE Titanium FRM06MCX0500200 1	Subconn DBH13M + DLSA-M [IP, Serial]	#
GND	GND	GND	GND	1
PWR	PWR	PWR	Iso GND (Shield) (NC on system end)	2
AUX0 Out	AUX1 Out	N/C	PWR	3
AUX0 RS-232 Tx / RS-485 B(-)	AUX1 RS-232 Tx / RS-485 B(-)	N/C	(Brown) TP4- [GigE]	4
AUX0 RS-232 Rx / RS-485 A(+)	AUX1 RS-232 Rx / RS-485 A(+)	AUX1 RS-232 Tx / RS-485 B(-)	(White/Brown) TP4+ [GigE]	5
		AUX1 RS-232 Tx / RS-485 B(-)	(Blue) TP3- [GigE]	6
		3G-SDI *Coax Core	(White/Blue) TP3+ [GigE]	7
		GND *Coax Shield	(Orange) TP1- [10/100]	8
Important notes: <ul style="list-style-type: none"> SubC bulkheads are wired to Ethernet B standard. 13 pin bulkhead is limited to 4A per pin. The camera automatically limits power to the LEDs. In-line cable part number for Ethernet bulkhead: Subconn DIL13F + DLSA-F 			(White/Orange) TP1+ [10/100]	9
			(Green) TP2- [10/100]	10
			(White/Green) TP2+ [10/100]	11



* wavelength in nm of fiber signal to be specified on Purchase Order

Email team@subcimaging.com for more information

Sensor and Lens

Pixel count: 21MP

Max image size: 5344 x 4008

Max shutter speed: 1/32500

Max video resolution: 4K UHD

Sensor: Exmor RS™

Lens: 1.92mm f/1.8

Zoom: 21MP sensor zoom
 (5x optical equivalent)

Focus Range: 0.1m to infinity

System

Max Continuous Still Rate: 3Hz

Recording codecs: H.265(HEVC), H.264

Live video: HDMI 2.0b over Fiber, Ethernet

Streaming codec: H.264

Internal recording capacity: 512 GB

Latency Ethernet: 225ms ±50ms

QC parameters of UltraOptics

Diagonal FOV: 116° min

Distortion: 2% max

Electronics

SDI Resolution: 4K/30p/25p,
 1080/60p/50p, 1080/30p/24p,
 720/60p/50p

Tx: 60m (GigE), 80m (10/100)

Tx with 2x LED: 20m (GigE), 40m (10/100)

Tx Power Fiber: 20+ dB

Protection: Short circuit, UV-OV,
 ESD, OT

Voltage: 16.5 - 32.5 Vdc

Control: Ethernet, Serial RS232/485

Power(W): 7.5(idle), 8(recording), 13.5(peak)


Mechanical

Materials: BK7, Grade 5 Titanium

Weight: 2.32Kg in water, 4.45Kg in air

Max in-water operating temp: 30°C

Depth Rating: 6000m

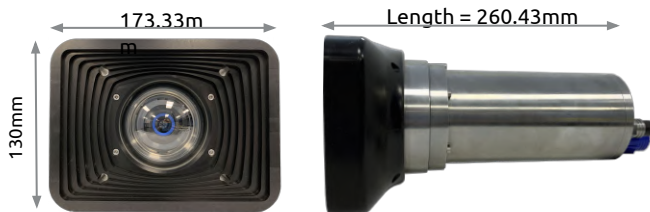

Subconn MCBH5F [AUX0 Port]	Subconn MCBH5F [AUX1 Port]	Subconn Optolink (Ti)	Subconn DBH13M + DLSA-M [IP, Serial]	#
GND	GND	6000m rated	GND	1
PWR	PWR	Solid molded cable only. No PBOF.	Iso GND (Shield) (NC on system end)	2
AUX0 Out	AUX1 Out	6G-SDI video SMPTE ST-2081	PWR	3
AUX0 RS-232 Tx / RS-485 B(-)	AUX1 RS-232 Tx / RS-485 B(-)	Singlemode	(Brown) TP4- [GigE]	4
AUX0 RS-232 Rx / RS-485 A(+)	AUX1 RS-232 Rx / RS-485 A(+)		(White/Brown) TP4+ [GigE]	5
Important notes: <ul style="list-style-type: none"> SubC bulkheads are wired to Ethernet B standard. 13 pin bulkhead is limited to 4A per pin. The camera automatically limits power to the LEDs. In-line cable part number for Ethernet bulkhead: Subconn DIL13F + DLSA-F Includes topside conversion box: HDMI 2.0b output			(Blue) TP3- [GigE]	6
			(White/Blue) TP3+ [GigE]	7
			(Orange) TP1- [10/100]	8
			(White/Orange) TP1+ [10/100]	9
			(Green) TP2- [10/100]	10
			(White/Green) TP2+ [10/100]	11
			AUX1 RS-485 B(-)	12
			AUX1 RS-485 A(+)	13



Included with your shipment:

1. Impact resistant shipping case with designed foam insert
2. Rayfin camera
3. Lasers, calibrated delrin mount and for attachment
4. Aquorea LED(s)
5. Component compartment:
 - a. 3m straight LED cable to plug into camera.
 - b. 0.5m Y-splice laser cable to plug into camera
 - c. 2x Titanium hose clamps for attachment of lasers to the camera
 - d. High pressure dummy plugs for camera Aux0 & Aux1 bulkheads
 - e. Test whip bench testing the camera and downloading offline
 - f. AC cable (matching your region) and AC-DC power supply (24VDC)
 - g. Cat5e Ethernet cable
6. USB stick with:
 - a. Windows 10 compatible Rayfin control software
 - b. Product manuals
 - c. QC documentation.
7. Documentation: complete QA checklist, pressure test certificates, packing list, datasheets and quick start guide. (under the lid foam)

